



DO ANYTHING, WITH

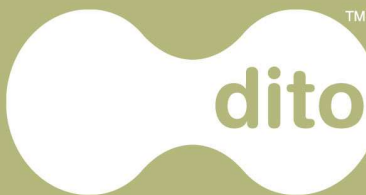

- Dito is an uncoated offset paper that offers to printers a very high printing performance in runnability and printability, also combined with a natural touch & feel and outstanding bulk.
- Dito is the paper of many talents, PEFC certified, for any job containing text, colour or images.
- Dito is designed for printing annual reports, brochures, catalogues, comics, illustrated books, manuals and price lists.

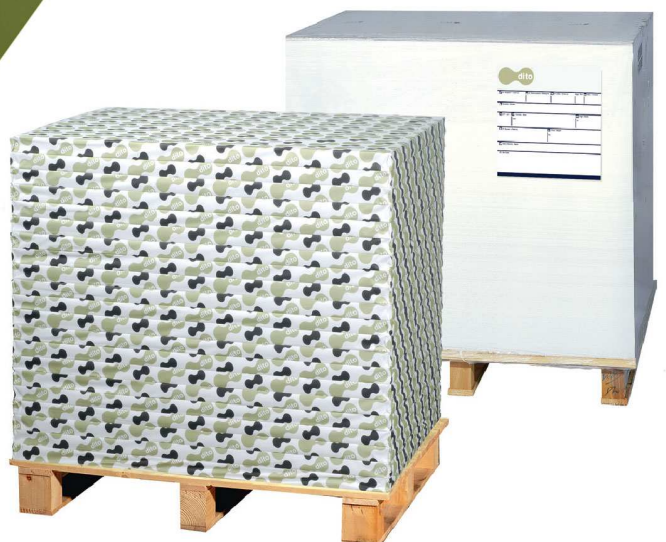

PARAMETER	STANDARD	UNIT											
BASIS WEIGHT	ISO 536	g/m ²	80	90	100	110	120	140	150	170	190	250	300
BRIGHTNESS (illuminant D65/10°)	ISO 2470-2	%	104	104	104	104	104	104	104	104	104	104	104
CIE WHITENESS (D65/10°)	ISO 11475	%	144	144	144	144	144	144	144	144	144	144	144
OPACITY	ISO 2471	%	91,5	93	94,5	95,5	96,5	98	98,5	>99	>99	>99	>99
ROUGHNESS Bendtsen	ISO 8791-2	ml/min	<400	<400	<400	<400	<400	<450	<450	<450	<500	<600	<700
THICKNESS	ISO 534	µm	103	114	123	136	146	168	180	200	221	285	342
SPEC. VOLUME	ISO 534	cm ³ /g	1,27	1,25	1,24	1,24	1,20	1,20	1,20	1,17	1,17	1,17	1,15
RELATIVE HUMIDITY (23°C)	TAPPI 502	%	50	50	50	50	50	50	50	50	50	50	50
PH VALUE	ISO 6588	-	>7	>7	>7	>7	>7	>7	>7	>7	>7	>7	>7

These values are to be considered only as indications and are subject to change according to trade tolerances in the quality specification

Issue date: May 2014



DO ANYTHING, WITH

